



6 Zone Mixer Amplifier with ATT/Mp3/USB/FM/Bluetooth AP-ZP60 / AP-ZP120 / AP-ZP240 / AP-ZP350 / AP-ZP500





AP-ZP60 / AP-ZP120 / AP-ZP240 / AP-ZP350 / AP-ZP500 6 Zone Mixer Amplifier with ATT/Mp3/USB/FM/Bluetooth

Description :

The PA 6 Zone Mixer Amplifier with MP3/USB/FM tuner/Bluetooth, its rated power output from 60W, 120W, 240W, 350W to 500W, it is ideal for school, super market, bank, hotel BGM and speech use. It is all in one solution with three sources, pre amplifier and mixer power amplifier into one 19" 2U height unit, which is economy but of high reliable performance. It integrates 3 audio sources into a mixer amplifier, plus Mic1(6.3mm) and Mic/Line input 2-4 (XLR), two line inputs, one EMC input and one RJ45 input for 6 zone remote paging microphone. Mic1 VOX with highest priority except EMC input. One USB and one SD slots on front provide easy access and operation for installer and end-user. The amplifier is design with complete protection of overload, short circuit and high temp to avoid any damage. These amplifiers are suitable for applications in bank, mosque, school, hotel, restaurant, theme centers and shopping center.

Features :

- Public address (PA) 6 zone commercial mixer power amplifier
- 19" rack mount amplifier of 2U height
- Rated outputs of 60W, 120W, 240W, 350W to 500W
- 6 zone speaker outputs of 100V
- Single zone 100V/70V/4-16 Ohm speaker outputs
- Six zone speaker outputs with independent volume control
- Built-in media player with MP3/USB/FM tuner/Bluetooth
- Mic1 input 6.3mm jack with VOX highest priority
- Mic/Line input 2-4 balanced XLR with mic/line switch and +48V phantom power selector
- Line 4-5 inputs on rear panel by RCA
- EMC input by RCA on rear panel with secondary priority except MIC1
- One amplifier capacity of 6 remote paging microphones AP-ZPS up to 300 meters
- Volume control for Mic1-4 and line 1-2, bass/treble/master and 6 zone volume control on front panel
- Visual indicators include AC and DC Power, protection, clip, 6 zone status and output level meters
- Complete amplifier protection includes overload, clip, short circuit and high temp protection
- 230V AC and 24V DC operation system

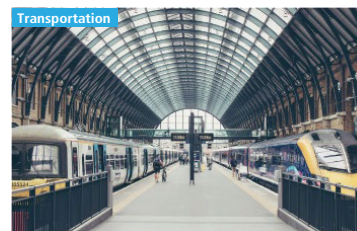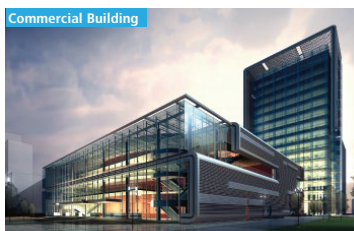

Technical Specifications


Model No	AP-ZP60	AP-ZP120	AP-ZP240	AP-ZP350	AP-ZP500
Description	6 Zone Mixer Amplifier with MP3/USB/FM tuner/Bluetooth				
Rated Power Output	60W	120W	240W	350W	500W
Speaker Output	6 zone speaker outputs of 100V				
	Single zone 100V/70V/4-16 Ohm speaker outputs				
Input	Mic1-4: 2.5mV, Mic1 of 6.3mm jack, Mic/line 2-4 of balanced XLR				
	Line1-2: 250mV, RCA				
	EMC: 250mV, RCA				
Frequency Response	80-16KHz				
T.H.D.	<0.1%				
S/N Ratio	>70dB				
Protection	High temp, short circuit, clip & overload protection				
Power Supply	230V AC & 24V DC, 50-60Hz				
Power Consumption	100W	200W	400W	500W	650W
Dimensions	484x405x88mm				
Weight	9.0kg	9.2kg	9.4kg	10.2kg	10.4kg

Remote Paging Microphone AP-ZPS

- Communication through CAT6 cable up to 200 meters
- Direct power supply from zone amplifier AP-ZP500
- 6 speaker zone individual, group or all zone paging
- Up to 6 Mics working simultaneously loop connection



Rear Panel:

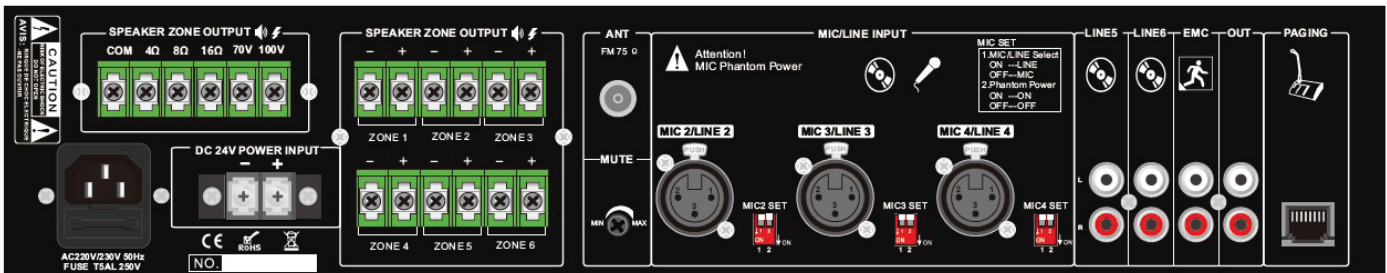

Model No	AP-ZP60	AP-ZP120	AP-ZP240	AP-ZP350	AP-ZP500
----------	---------	----------	----------	----------	----------

Connection Diagram:

