



Intelligent NVR AM-i840-UHD 40ch 8HDD Intelligent NVR



Superior Engineering Design & Sensational Image Quality

AM-i840-UHD 40ch 8HDD Intelligent NVR



H.265+ VIDEO COMPRESSION



4K ULTRA HD RESOLUTION



HDMI



VGA



RAID



VIDEO ANALYTICS



ANR



SMART RECORD & PLAYBACK



RJ45 LAN



HDD GROUPING & QUOTA



TRIGGER ALARM



P2P CLOUD

Features :

- S+265/H.265/S+264/H.264 video formats
- Connectable to the third-party network cameras
- Support live view, storage, and playback of the connected camera at up to 16MP resolution
- HDMI and VGA independent outputs
- HDMI Video output at up to 4K resolution
- 8 SATA interface, up to 10TB for 1 HDD
- 2×RJ45 self-adaptive 10/100/1000 Mbps network interface
- VCA detection alarm is supported
- Support cloud upgrade

Technical Specifications

Model No	AM-i840-UHD
Access Channel	40
Incoming Bandwidth	640Mbps
Outgoing Bandwidth	320Mbps
Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview decoding capability	16MP*3, 12MP*4, 8MP*6, 6MP*8, 5MP*9, 4MP*12, 3MP*16, 1080P*24, 720P*40, 4CIF*40
Playback decoding capability	16MP*3, 12MP*4, 8MP*6, 6MP*8, 5MP*9, 4MP*12, 3MP*16, 1080P*16, 720P*16
Video Output	independent HDMI1 and HDMI2 outputs independent VGA1 and VGA2 outputs simultaneous HDMI1 and VGA1 outputs simultaneous HDMI2 and VGA2 outputs
HDMI Output	HDMI:800*600(60Hz), 1024*768(60Hz), 1280*720(50Hz/60Hz), 1280*800(60Hz), 1366*768(60Hz), 1440*900(60Hz), 1920*1080(50Hz/60Hz), 2560*1440(30Hz/60Hz), 2560*1600(60Hz), 3840*2160(30Hz/60Hz)
VGA Output	VGA:800*600(60Hz), 1024*768(60Hz), 1280*720(50Hz/60Hz), 1280*800(60Hz), 1366*768(60Hz), 1440*900(60Hz), 1920*1080(50Hz/60Hz)
Multi-screen Display	1/2/3/4/5/6/7/8/9/10/12/13/16/20A/20B/25/32/36/40
Third-party Camera Access	ONVIF;RTSP
Audio Input	1-ch, 3.5mm
Audio Output	1-ch, 3.5mm;BNC
Liveview display	Independent Output: HDMI1/VGA1: 1/2/3/4/5/6/7/8/9/10/12/13/16/20A/20B/25/32/36/40 HDMI2/VGA2: 1/2/3/4/5/6/7/8/9/10/12/13/16/20A/20B/25/32/36/40
Compression	
Video	S+265;H.265;S+264;H.264
Audio	G711A;G711U;AAC;ADPCM_DIV4
Stream Type	Video;Video & Audio
Network	
Network Protocol	ARP;DDNS;DHCP;DNS;Easy DDNS;FTP;HTTP;HTTPS;ICMP;IGMP;IPv4;IPv6;Multicast;NFS;NTP;PPPoE;RTCP;RTP;RTSP;SMB/CIFS;SMTP;SNMP;SRTP;SSH;SSL;TLSv1.2, TLSv1.3;TCP/IP;UDP;Unicast;UPnP
System Compatibility	ONVIF(profile T/S/G)
Web	IE10+;Firefox52+;Edge89+;Safari11+;Chrome57+
Record Playback	
Multi-channel Playback	16
Record Mode	Manual recording;alarm recording;Schedule recording
Storage	Local HDD/USB storage device/eSATA
Backup	USB storage device
Playback Function	Play/Pause/Stop/Slow/Speed/Backwards 30s/Forwards 30s/Full screen/backup(video Editing)/Step/Digital Zoom
Alarm	
General Alarm	Motion;Mask Alarm;Alarm Input(IPC);Video Loss;Alarm Input(NVR);Manual Alarm
Alert Alarm	IP Conflict;MAC Conflict;Network Disconnected;No disk;Illegal Access;Disk group space alert;Disk Full;Disk R/W error;Video Abnormal;Abnormal found in smart of disk;Abnormal temperature of the disk;IPC voltage abnormal;RTC failure


Technical Specifications

Model No.	AM-i840-UHD
Intelligent Analytics	
VCA Detection by Camera	Tripwire;Double Tripwire;Perimeter;Object Abandon;Object Missing;Loiter;Running;Parking;Heatmap;Lens Dignose;Scene Switch Dignose;Signal Abnormal Detection;Signal Loss Detection;Plate License Recognition;On Duty Detection;Crowd Detection;Parking guard;Safety Helmet Detection;Electric vehicle testing;People Counting;Link To Tracking;Fireworks detection;Environmental temperature measurement;Face Detection;Human body temperature measurement;Advanced Intelligence
VCA Search	Heatmap;Early-warning search;Behavior Search;Plate license search;Search safety helmet;Thermographic retrieval;Duty search;Electric vehicle retrieval;Facial search
External Port	
HDD	8 SATA ports, up to 10 TB for a single HDD. The maximum HDD capacity varies with environment temperature
Disk Group	8 Disk Group
RAID	JBOD, RAID0, RAID1, RAID5, RAID6, RAID10
eSATA	1eSATA
USB	2*USB2.0; 1*USB3.0
HDMI	2*HDMI(supports up to 4K resolution output)
VGA	2*VGA
RJ-45	2*RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
SATA	8 SATA interface
RS232	1*RS232
RS485	2*RS485
Alarm I/O	16channel in; 4channel out
General Parameter	
UI Language	English
Power Supply	100~240V AC
Power Consumption	< 18W(HDD not included, idling)
NetWeight	7.65Kg
GrossWeight	10.03Kg
Boundary Dimensions	440(L)460(W)94(H)mm
Package Dimensions	565(L)565(W)220(H)mm
Operating Temperature	-10°C~+55°C
Operating Humidity	10%~90%RH
Storage Temperature	-10°C~+55°C
Storage Humidity	10%~90%RH

Technical Specifications

Model No. **AM-i840-UHD**

DIMENSIONS (Unit: mm)

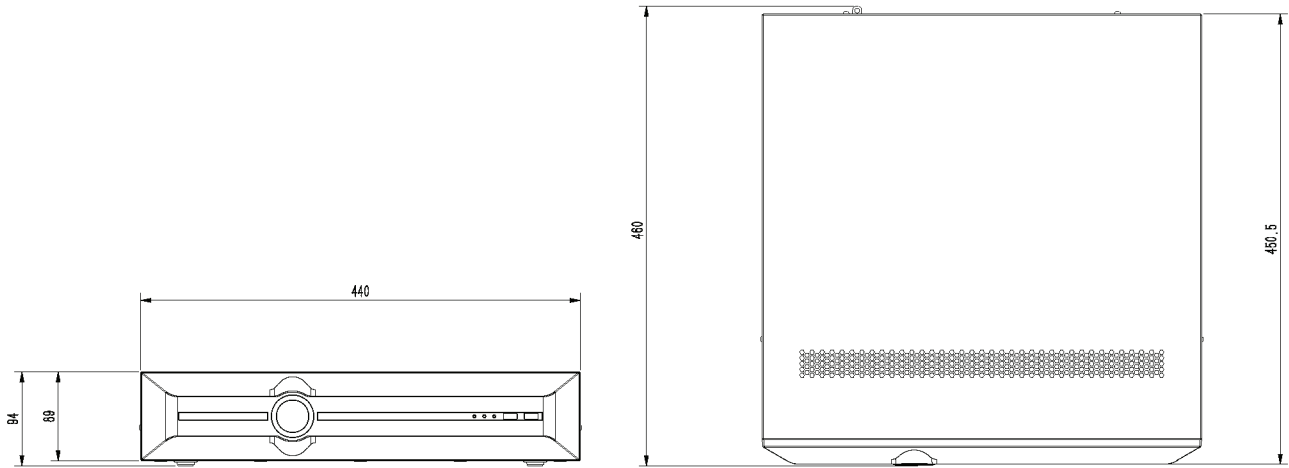

Physical Interfaces

